

The Forest fx collection of wood effect vinyl sheet floorcoverings is specifically designed for a wide range of commercial interiors. The contemporary and creative timber designs are ideal for education, healthcare, office, retail and leisure sectors, developed and presented in a practical, resilient and hygienic product construction.

Adding to the established success of the collection, the top selling designs have been joined by fresh and exciting effects creating a varied and authentic wood palette, demonstrated by the intricate grains and natural colourways.

The durability of Forest fx lends itself perfectly to the demands of commercial interiors, leading with the key advantages of aesthetics and performance, with the added flexibility to meet

corporate design schemes. Unique floor designs can easily be achieved by incorporating inlaid features and logos, managed by Polyflor's in house design team.

To further enhance the floorcovering, Forest fx features a high quality, cross-linked polyurethane reinforcement (PUR) providing a low cost, polish-free maintenance regime for the lifetime of the product.

Forest fx is 100% recyclable and achieves BRE A+ certification for major use areas based on a life cycle analysis approach over a building life of 60 years, making the collection environmentally preferable which meets decorative, practical, budgetary and maintenance objectives.



Specifications	Standards	Forest fx
Type of Floorcovering	EN 649	Heterogeneous
Product Enhancement		PUR
Gauge	EN 428	2.0mm
Wear Layer	EN 429	0.7mm
Performance Classification	EN 685	23, 34, 43
Roll Size	EN 427	2m x 20m = 40m ²
Total Weight	EN 430	2,700g/m ²
Residual Indentation	EN 433	≤ 0.1mm
Abrasion Resistance	EN 649	Group T
Dimensional Stability	EN 434	≤ 0.40%
Behaviour to Fire	EN 13501-1	Bfl-S1
Slip Resistance	DIN 51130	R10 For safety flooring with sustainable wet slip resistance, refer to the Polysafe ranges.
	EN 13893	DS (Dry Slip)
Light Fastness	ISO 1056-B02(Method3)	≥ 6
Resistance to Chemicals	EN 423 (ASTM F 1303-99)	Excellent
Underfloor Heating Suitability		Suitable, Max 27°C
Castor Chair Suitability	EN 425	Yes, type W, EN 12 529
VOC Test	AgBB	Low Emissions
Electrical Behaviour (body voltage)	EN1815	This product does not accumulate static charges above 2kV and is classified as 'antistatic'. For specialist applications where there is requirement to dissipate the electrostatic charge, see the Polyflor ESD product range.
Hygiene		This product has been independently tested and results demonstrate that it inhibits the growth of MRSA. An effective cleaning regime is however, the most important defence against infection.
Environmentally Preferable Flooring		Polyflor Forest FX PUR achieves a BRE Global Environmental A+ Rating (Certificate No: ENP 415) in major use areas such as education and healthcare. Polyflor Forest FX PUR is 100% recyclable. A full Environmental Report detailing Polyflor's achievements in areas such as recycling, energy reduction and waste avoidance can be found at www.polyflor.com/environment .



FalckDesign AB
Energigatan 9, SE-434 23 Kungälv, Sweden
Tel: +46 (0) 300 15820
E-mail: info@falckdesign.com

objectflor Art und Design Belags GmbH
Wankelstraße 50, 50996 Köln, Germany
Tel: +49 (0) 2236 966 330
E-mail: info@objectflor.de

Polyflor Australia Pty Ltd
59-65 Wedgewood Road, Hallam, Vic 3803, Australia
Tel: 1800 777 425
E-mail: sales@polyflor.com.au

James Halstead Flooring New Zealand Ltd
100 Plunket Ave, Manukau 2104 New Zealand
PH: 0800 425 783
E-mail: sales@polyflor.co.nz

Polyflor Canada
304 Stone Road West, Suite 550 Guelph, Ontario, N1G 4W4 Canada
Tel: +1 519 763 3088
E-mail: acrawford@polyflor.ca

Polyflor Contract Ltd
Office 12, Business centre "Strela", d. 113, liiter B, Ligovskiy pr., St. Petersburg, Russia.
Tel: +7 812 332 42 02
E-mail: sales@polyflor.ru

Polyflor Hong Kong
Room 2409, 24th Floor, New York Life Tower, Windsor House, Causeway Bay, Hong Kong
Tel: +852 2865 0101
E-mail: anthonylam@polyflor.com.hk

Polyflor Ireland
Unit 106, Millennium Trade Park, Ballycoolin, Blanchardstown, Dublin 11
Tel: +353 (1) 864 9304
E-mail: tmockler@polyflor.com

Polyflor Middle East
PO Box 71862, Dubai, UAE
Tel: +971 4 349 1078
E-mail: espm@eim.ae

Polyflor Nordic
Kjelsåsveien 168 B, N-0884 Oslo, Norway
Tel: +47 23 00 84 00
E-mail: firmapost@polyflor.no

Polyflor Polska
Ul Gronowa 22/506, Poznań 61-680, Poland
Tel: +48 61 820 3155
E-mail: polyflor@polyflor.com.pl

Poly Sales Africa (Pty.) Ltd
PO Box 3967, Edenvale 1610, South Africa
Tel: (27) 11 609-3500
E-mail: info@polyflor.co.za

POLYFLOR LTD. PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK
UK SALES DIRECT: +44 (0)161 767 1122 UK SAMPLE REQUESTS: +44 (0)161 767 2551
EXPORT SALES DIRECT: +44 (0)161 767 1913 TECHNICAL SUPPORT: +44 (0)161 767 1912
RECEPTION: +44 (0)161 767 1111 UK FAX: +44 (0)161 767 1128
EXPORT FAX: +44 (0)161 767 1166 E-MAIL: INFO@POLYFLOR.COM
WEBSITE: WWW.POLYFLOR.COM



new



Forest fx™
Wood effect sheet vinyl flooring



Front cover: 3330 Rustic Oak

2990 Oiled Oak
3150 Smoked Oak



3100 Classic Oak

Forest fx represents the natural beauty and sophistication of wood in a practical and durable vinyl sheet format. This contemporary and wide-ranging palette is further enhanced by a variety of plank sizes, each carefully designed for natural authenticity.

Forest fx™



3090 Vermont Maple* w/r 3090



3290 Warm Beech* w/r 3290



3380 American Oak* w/r 3380



3330 Rustic Oak* w/r 3330



3340 European Oak* w/r 3340




3310 Rich Cherry w/r 3310



3110 Stained Maple* w/r 3110



3360 Mahogany w/r 3360

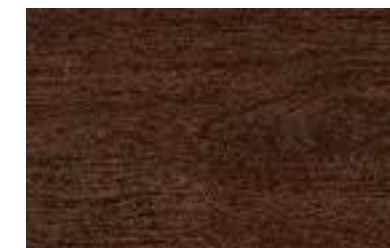

3990 Brazilian Walnut w/r 3990

WIDE PLANK DESIGNS



2990 Oiled Oak* w/r 2990



3100 Classic Oak* w/r 3380



3120 French Walnut w/r 3120



3150 Smoked Oak* w/r 3150



3230 Classic Walnut* w/r 3230

* Acoustic variants of these products are also available if impact sound reduction is required. See the Acoustix Forest fx and Acoustix Gallery fx collections.

Subject to change for reasons of further technical development. The collection images are only photographic reproductions of the respective products and show only a small area. Variation in colour and design is a feature of these products intended to enhance the natural appearance of the floor. With regard to colour printing of the photographic images, it is only possible to give a provisional representation of the colour. For colour selection, an original sample should be used which we shall be pleased to send by return.

