


Heavy-duty safety flooring
with enhanced slip resistance

**SAFETY
FLOORING**

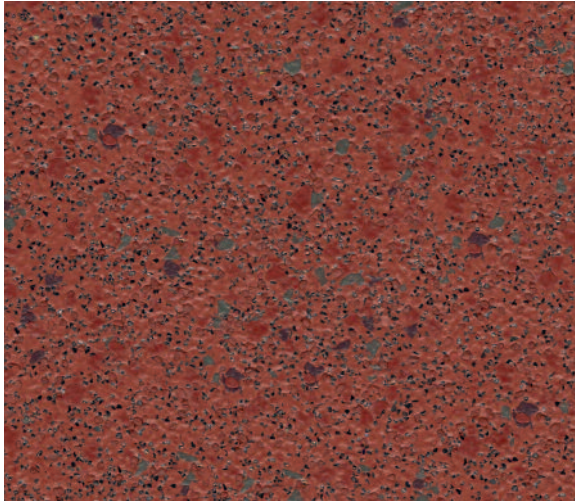

LRV 12.4

NCS S 6020-Y80R

Iron Ore 4340

w/r 4640




LRV 22.9

NCS S 5005-Y80R

Mortar 4360

w/r 4600

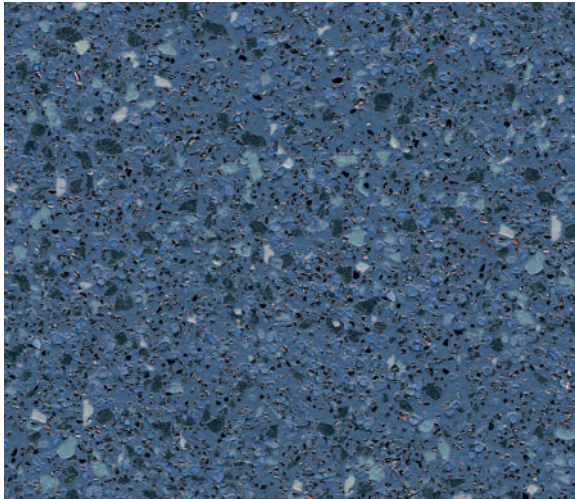


LRV 14.2

NCS S 5020-R80B

Bluestone 4390

w/r 4910

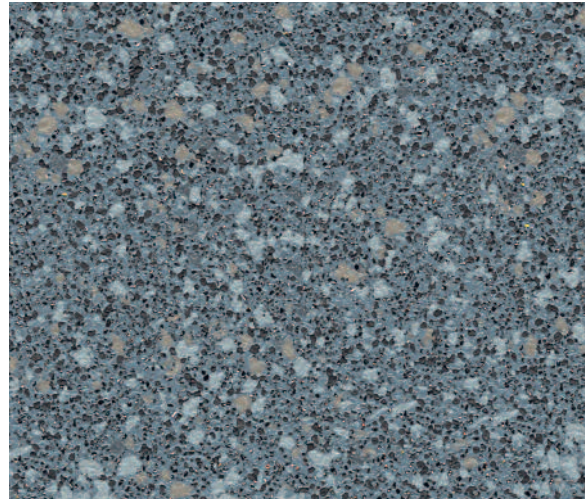

LRV 18.7

NCS S 5010-P90B

Pearl Granite 4330

w/r 4670




LRV 14.6

NCS S 6000-N

Aurora Grey 4290

w/r 4610

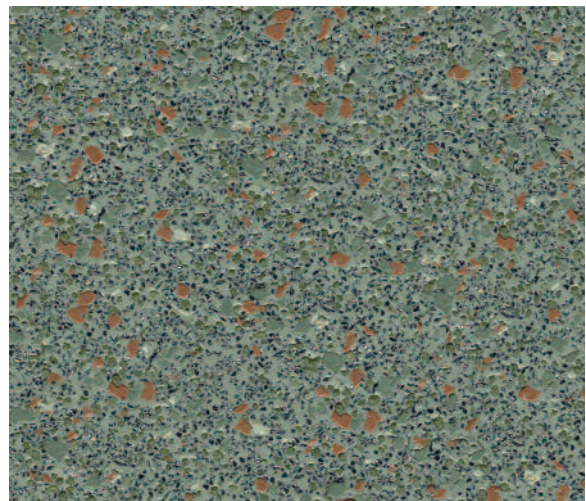

LRV 22.6

NCS S 5005-G50Y

Baltic Green 4350

w/r 4350



w/r = weld rod



^o Refer to BRE Global ratings on www.greenbooklive.com

The closest perceived NCS - Natural Colour System references are quoted for your convenience. For more information see www.ncscolour.com
Light Reflectance Values (LRV) - all colours are tested in accordance with BS8300:2009.